

GRAS 40A0-FV

1/2" Prepolarized Pressure Microphone, Front Vented



Freq range: 3.15 Hz to 20 kHz
Dyn range: 20 dB(A) to 163 dB
Sensitivity: 12.5 mV/Pa

The 40A0-FV is an IEC 61094 WS2P 1/2" prepolarized pressure microphone with front venting.

It is a high-precision condenser microphone made according to IEC 61094-4 requirements and is ideal for coupler measurements in both laboratory and production environments. It is extremely robust and reliable and can measure sound pressure levels up to 160 dB in the range of 3.15 Hz to 20 kHz.

40A0-FV is individually factory-calibrated and delivered with a calibration chart stating its specific open-circuit sensitivity and pressure frequency response.

Typical applications and use

The broad working range and reliability has made 40AO-FV the preferred prepolarized microphone for coupler and ear simulator setups and is the natural supplement or replacement of existing solutions.

It is used for production line testing in coupler setups for test of hearing aids, earphones, headphones, and headsets.

The KEMAR Manikin can also be configured with 40AO-FV for wide-band binaural sound quality recordings.

40AO-FV can be used in

- GRAS IEC 60318-1 Ear Simulator RA0039
- GRAS IEC 60318-5 2cc Coupler RA0038 (incl. protection grid)
- GRAS KEMAR Manikin 45BA

Other coupler systems can be configured with the 40AO-FV and a CCP preamplifier on request.

The 40AO-FV is a very versatile microphone when connected to the RA0067 Transmitter Adapter for 1/2" Microphones. The 40AO becomes a high-impedance sound source when the RA0067 takes a calibration signal directly from the signal generator and makes the microphone behave like an electrostatic loudspeaker. In a coupler, this gives a frequency response that is as good as when the 40AO behaves like a microphone.

Compatibility

The 40AO-FV requires a standardized 1/2" or 1/4" CCP preamplifier and an input module that supports this technology with a BNC, SMB, or Microdot connector.

System verification

For daily verification and check of your measurement setup, we recommend using a

calibrator like GRAS Sound Level Calibrator 42AG.

For proper sensitivity calibration, we recommend using a pistonphone like GRAS Intelligent Pistonphone 42AP.

Calibration

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment and internal quality control programs we recommend that the microphone is recalibrated at least once a year.

We offer two kinds of calibration as an optional after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration in stead of the default factory calibration, specify this when ordering.

Learn more at [gras/calib](https://www.gras.com/calib).

Quality and warranty

All GRAS microphones are made of high-quality materials that will ensure life-long stability and robustness. The microphones are all assembled in verified clean-room environments by skilled and

dedicated operators with many years of expertise in this field.


The microphone diaphragm, body, and improved protection grid are made of high-grade stainless steel, which makes the microphone resistant to physical damage, as well as corrosion caused by aggressive air or gasses.

This, combined with the reinforced gold-plated microphone terminal which guarantees a highly reliable connection, enables GRAS to offer 5 years warranty against defective materials and workmanship.


Service

If you accidentally damage the diaphragm on a GRAS microphone, we can—in most cases—replace it at a very reasonable cost and with a short turn-around time. This not only protects your investment, but also pleases your quality assurance department because you don't have to worry about new serial numbers, etc.

| | | |
|---|---|-------------------------|
| Polarization/Connection | | 0 V / CCP |
| Frequency range (± 1 dB) | Hz | 5 to 12.5 k |
| Frequency range (± 2 dB) | Hz | 3.15 to 20 k |
| Dynamic range lower limit (microphone thermal noise) | dB(A) | 25 |
| Dynamic range lower limit with GRAS preamplifier | dB(A) | 25 |
| Dynamic range upper limit | dB | 163 |
| Dynamic range upper limit with GRAS preamplifier @ +28 V / ± 14 V power supply | dB | 153 |
| Dynamic range upper limit with GRAS preamplifier @ +120 V / ± 60 V power supply | dB | 163 |
| Dynamic range upper limit with GRAS CCP preamplifier | dB | 150 |
| Open-circuit sensitivity @ 250 Hz (± 3 dB) | mV/Pa | 12.5 |
| Open-circuit sensitivity @ 250 Hz (± 3 dB) | dB re 1V/Pa | -38 |
| Resonance frequency | kHz | 32 |
| Microphone cartridge capacitance, typ. | pF | 20 |
| Microphone venting | | Front |
| Temperature range, operation | $^{\circ}\text{C}$ / $^{\circ}\text{F}$ | -40 to 120 / -40 to 248 |
| IEC 61094-4 Designation | | WS2P |
| Temperature range, storage | $^{\circ}\text{C}$ / $^{\circ}\text{F}$ | -40 to 85 / -40 to 185 |
| Humidity range non condensing | % RH | 0 to 90 |
| Temperature coefficient @250 Hz | dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$ | -0.01 / -0.006 |
| Humidity coefficient @250 Hz | dB/% RH | -0.001 |
| Static pressure coefficient @250 Hz | dB/kPa | -0.007 |
| Influence of axial vibration @1 m/s ² | dB re 20 μPa | 66 |
| CE/RoHS compliant/WEEE registered | | Yes / Yes, Yes |
| Weight | g / oz | 6.5 / 0.229 |

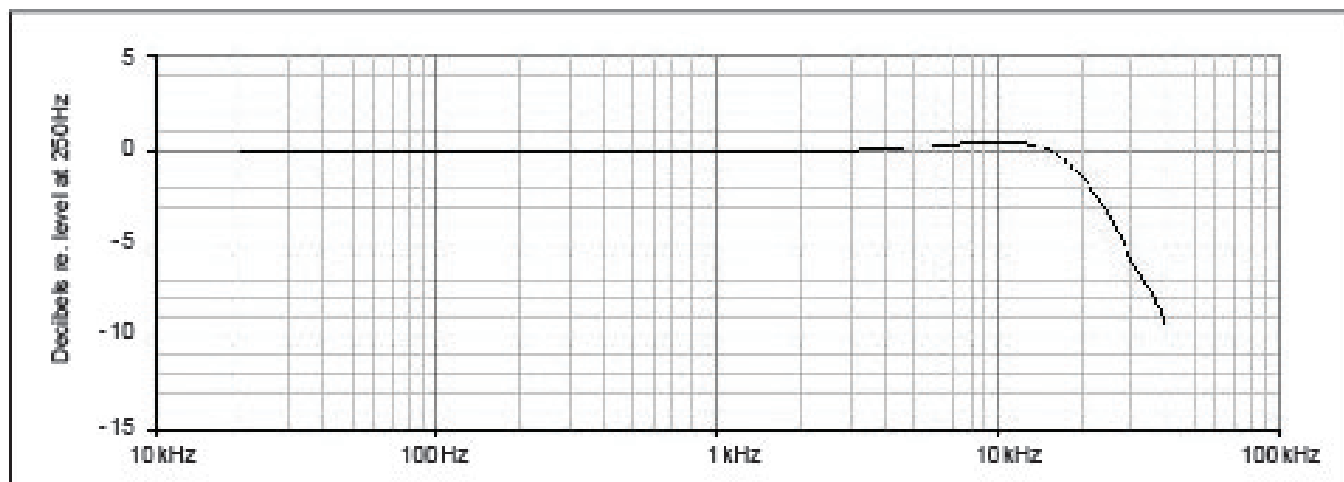



Typical frequency response.

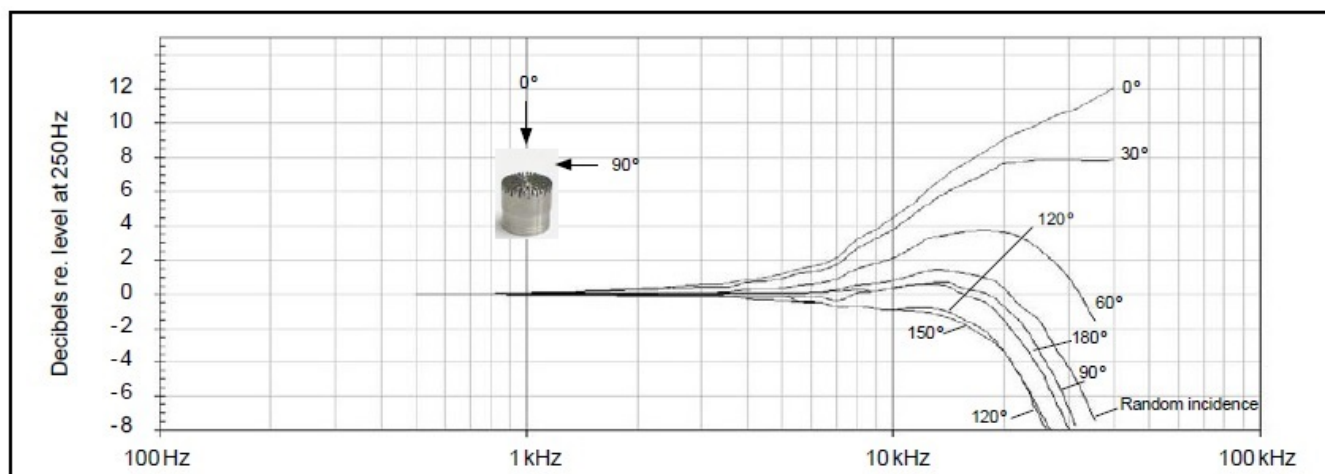

Free-field corrections for different angles of incidence

GRAS Sound & Vibration reserves the right to change specifications without notice.

Dimensions in mm

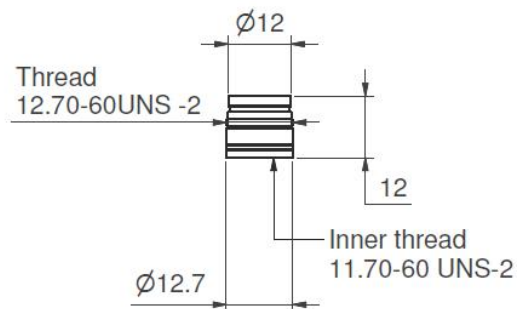

| | |
|-------------|--------------------------------------|
| GRAS CA0001 | Traceable Calibration of Microphone |
| GRAS CA2001 | Accredited Calibration of Microphone |

GRAS Sound & Vibration reserves the right to change accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more
than 40 countries

HEAD OFFICE, DENMARK
GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.GRASacoustics.com
gras@grasacoustics.com

USA
GRAS SOUND & VIBRATION
9290 SW Nimbus Avenue
Beaverton, OR 97008
Tel: 503-627-0832
Toll Free: 800-231-7350
www.GRASacoustics.com
sales-usa@grasacoustics.com

UK
GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0) 7762 584 202
www.GRASacoustics.com
sales-uk@grasacoustics.com

CHINA
GRAS SOUND & VIBRATION
Room 315, RuiBo Center(T1)
Lane683, Shenhong Rd,
Minhang District,
Shanghai, China, 201107
Tel: +86 21 64203370
www.GRASacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

grasacoustics.com

GRAS
An Axiometrix Solutions Brand