

# GRAS 40GI

1/2"



Freq response: IEC 61043

Dyn range: 27 dB(A) to 163 dB

Sensitivity: 12.5 mV/Pa

40GI IEC 61043

[GRAS 40AI.](#)

## Introduction

The 40GI microphone pair consists of two phase-matched free-field condenser microphones with extremely well-controlled phase characteristics for use in sound-intensity probes. Their standard mounting threads make them compatible with all the usual available makes of measurement-microphone preamplifiers.

As a microphone pair, the free-field frequency response of the 40GI complies with IEC 61043 1993 Class 1 and IEC 60651 Type 1 in the range from 20 Hz to 10 kHz.

Two 40GI microphones are included in the 40GK microphone kit, which is used in the GRAS CCP Sound Intensity Probe Type 50GI.

40GI is individually factory-calibrated and delivered with a calibration chart stating its specific open-circuit sensitivity and pressure frequency response.

## Typical applications and use

The 40GI is designed for sound-intensity and sound-power measurements, as well as sound-source localization, which is why it is included in the 50GI probe. Each 40GI microphone pair is phase matched according to the phase specifications for a Class 1 Sound Intensity Probe in accordance with international IEC 61043, Electroacoustics - Instruments for the Measurement of Sound Intensity - Measurements with Pairs of Pressure Sensing Microphones, 1993.

The quality of a sound intensity probe microphone is its ability to measure the real part of a complex sound intensity in highly reactive sound fields as well as in sound fields exposed to high levels of background noise. This ability depends largely on the phase responses of the microphone pair. The individual phase matching of each 40GI ensures that any differences in phase responses are extremely

small.

The 40GI is also used for ranking of sound sources. When mounted in a sound-intensity probe such as the 50GI, the microphones can pinpoint the area generating the most noise, which may then require additional measurements, depending on the measurement procedures and processes used. The sound-intensity microphones reveal the weak and strong points when identifying noise sources. Sound-source ranking is useful as long as the background noise doesn't exceed the noise source.

## Compatibility

The 40GI requires a standardized 1/4" CCP preamplifier and an input module that supports this technology. GRAS recommends using the [GRAS 26CB](#) preamplifier.

When used in the 50GI Sound-Intensity Probe, the 40GI is combined with the 26CB 1/4" CCP preamplifier.

## System verification

For daily verification and check of your measurement setup, we recommend using a calibrator like [GRAS 42AG](#) Sound Calibrator.

For proper sensitivity calibration, we recommend using a pistonphone like [GRAS 42AP](#) Intelligent Pistonphone.

## Calibration

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment and internal quality control programs we recommend that the microphone is recalibrated at least once a year.

We offer two kinds of calibration as an optional

after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration in stead of the default factory calibration, specify this when ordering.

Learn more at [gras/calib](http://gras/calib).

## Quality and warranty

All GRAS microphones are made of high-quality materials that will ensure life-long stability and robustness. The microphones are all assembled in verified clean-room environments by skilled and dedicated operators with many years of expertise in this field.

The microphone diaphragm, body, and improved protection grid are made of high-grade stainless steel, which makes the microphone resistant to physical damage, as well as corrosion caused by aggressive air or gasses.

This, combined with the enforced gold-plated microphone terminal which guarantees a highly reliable connection, enables GRAS to offer 5 years warranty against defective materials and workmanship.


## Service

If you accidentally damage the diaphragm on a GRAS microphone, we can—in most cases—replace it at a very reasonable cost and with a short turn-around time. This not only protects your investment, but also pleases your quality assurance department because you don't have to worry about new serial numbers, etc.

|   |                   |                         |
|---|-------------------|-------------------------|
| Polarization/Connection   |                   | 0 V / CCP               |
| Frequency range ( $\pm 1$ dB)   | Hz                | IEC 61043 Class 1       |
| Dynamic range lower limit (microphone thermal noise)                                | dB(A)             | 20                      |
| Dynamic range lower limit with GRAS preamplifier                                    | dB(A)             | 27                      |
| Dynamic range upper limit   | dB                | 163                     |
| Dynamic range upper limit with GRAS preamplifier @ +28 V / $\pm 14$ V power supply  | dB                | 153                     |
| Dynamic range upper limit with GRAS preamplifier @ +120 V / $\pm 60$ V power supply | dB                | 163                     |
| Dynamic range upper limit with GRAS CCP preamplifier                                | dB                | 150                     |
| Polarization voltage  | V                 | 0 V / CCP               |
| IEC 61094-4 Compliance  |                   | WS3P                    |
| Temperature range, operation  | °C / °F           | -40 to 120 / -40 to 248 |
| Temperature range, storage  | °C / °F           | -40 to 85 / -40 to 185  |
| Temperature coefficient @250 Hz   | dB/°C / dB/°F     | -0.01 / -0.006          |
| Static pressure coefficient @250 Hz   | dB/kPa            | -0.014                  |
| Humidity range non condensing   | % RH              | 0 to 100                |
| Humidity coefficient @250 Hz  | dB/% RH           | -0.001                  |
| Influence of axial vibration @1 m/s <sup>2</sup>                                    | dB re 20 $\mu$ Pa | 66                      |
| CE/RoHS compliant/WEEE registered   |                   | Yes / Yes, Yes          |
| Weight  | g / oz            | 7 / 0.247               |

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Dimensions in mm.

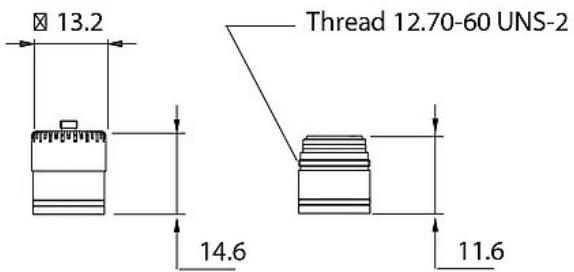

## Optional items

|                           |  |
|---------------------------|--|
| GRAS 26CB Set             | 1/4" CCP Standard Preamplifier with Microdot Connector |
| <a href="#">GRAS 42AG</a> | Multifunction Sound Calibrator, Class 1                |
| <a href="#">GRAS 42AP</a> | Intelligent Pistonphone, Class 0                       |
| GRAS CA0001               | Traceable Calibration of Microphone                    |
| GRAS CA2001               | Accredited Calibration of Microphone                   |

GRAS Sound & Vibration reserves the right to change accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

## HEAD OFFICE, DENMARK

**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

## USA

**GRAS SOUND & VIBRATION**  
9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

## UK

**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

## CHINA

**GRAS SOUND & VIBRATION**  
Room 315, RuiBo Center(T1)  
Lane683, Shenhong Rd,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 64203370  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require. GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand