GRAS 40DD

1/8"





6.5 Hz - 70 kHz 49 dB(A) - 175 dB 0.9 mV/Pa

40DD IEC 61094 1/8" IEC 61094-4

174 dB

6 Hz -

140 kHz



```
40DD
     IEC 61094 1/8"
                             GRAS
<u>40DP</u>
                                                 GRAS 5
 IEC 61094-4
                                174
dB 6 Hz - 140 kHz
                                     GRAS
40DD
    40DD-FV 1/8"
40DD
   40DD 67SB
40DD
         1/8"
               1/4"
GRAS 42AG
        GRAS 42AP
GRAS
       GRAS
              GRAS
GRAS
                      GRAS
GRAS
     GRAS
                 ISO 17025 DANAK
gras/calib
```




GRAS

Specifications

Polarization/Connection		0 V / CCP
Frequency range (±1 dB)	Hz	10 to 25 k
Frequency range (±2 dB)	Hz	6.5 to 70 k
Frequency range (±3 dB)	Hz	6.5 to 140 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	49
Dynamic range lower limit with GRAS preamplifier	dB(A)	52
Dynamic range upper limit	dB	175
Dynamic range upper limit with GRAS preamplifier @ +28 V / ±14 V power supply	dB	175
Dynamic range upper limit with GRAS preamplifier @ +120 V / \pm 60 V power supply	dB	175
Dynamic range upper limit with GRAS CCP preamplifier	dB	175
Open-circuit sensitivity @ 250 Hz (±3 dB)	mV/Pa	0.9
Resonance frequency	kHz	160
Microphone cartridge capacitance, typ.	pF	3.5
Microphone venting		Rear
IEC 61094-4 Compliance		WS3P
Temperature range, operation	°C / °F	-40 to 120 / -40 to 248
IEC 61094-4 Designation		WS2F
Temperature range, storage	°C / °F	-40 to 85 / -40 to 185
Temperature coefficient @250 Hz	dB/°C / dB/°F	-0.01/-0.006
Humidity range non condensing	% RH	0 to 90
Static pressure coefficient @250 Hz	dB/kPa	-0.014
Humidity coefficient @250 Hz	dB/% RH	-0.001
Influence of axial vibration @1 m/s²	dB re 20 μPa	59
CE/RoHS compliant/WEEE registered		Yes / Yes, Yes
Weight	g / oz	1.5 / 0.053




Specifications

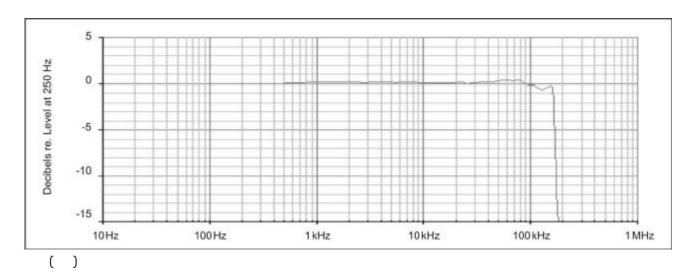


GRAS Sound & Vibration

Dimensions

Dimensions in mm





Ordering info

••	GRAS 40DD	1/8"	
	GRAS 40DD-FV	1/8"	40DD
	GRAS CA0001		
	GRAS CA2001		

GRAS Sound & Vibration



GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION

Skovlytoften 33 2840 Holte Denmark Tel: +45 4566 4046 www.GRASacoustics.com gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue Beaverton, OR 97008 Tel: 503-627-0832 Toll Free: 800-231-7350 www.GRASacoustics.com sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION

Unit 115, Gibson House, Ermine Business Park, Huntingdon, Cambridgeshire, PE29 6XU Tel: +44 (0) 7762 584 202 www.GRASacoustics.com sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1) Lane683, Shenhong Rd, Minhang District, Shanghai, China, 201107 Tel: +86 21 64203370 www.GRASacoustics.cn cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

GRAS

An Axiometrix Solutions Brand

grasacoustics.com