

GRAS 40DD

1/8" 预极化压力场传声器



频率范围 6.5 Hz - 70 kHz
动态范围 49 dB(A) - 175 dB
灵敏度 0.9 mV/Pa

40DD 是一款符合 IEC 61094 标准、带后置通气孔的 1/8" 预极化压力场传声器。它是一款根据 IEC 61094-4 标准要求制造的高精度电容传声器。其极小的尺寸使其可用于测量极高频率的声音而不会干扰声场。它可测量高达 174 dB 的声压级，频率范围为 6 Hz - 140 kHz

简介

40DD 是一款符合 IEC 61094 标准、带后置通气孔的 1/8" 预极化压力场传声器。阅读关于外极化等效型号 [GRAS 40DP](#) 的信息。

它是一款根据 IEC 61094-4 标准要求制造的高精度电容传声器。其极小的尺寸使其可用于测量极高频率的声音而不会干扰声场。它可测量高达 174 dB 的声压级，频率范围为 6 Hz - 140 kHz

40DD 经过单独的出厂校准，并附有一份校准图表，其中注明其具体的开路灵敏度和压力场频率响应。

另提供前置通气孔版本 40DD-FV 1/8" 预极化压力场传声器，前置通气孔型。

典型应用与用途

40DD 的灵敏度较低，使其非常适合在高频和极高声压级下的声音测量，以及脉冲噪声的测量。

因其宽广的频率响应 40DD 被包含在 67SB 冲击波探针式传声器中。

兼容性

40DD 必须与一个适配器配合使用，以便将 1/8" 传声器安装到 1/4" 前置放大器上。

系统验证

对于您测量装置的日常验证和检查，我们建议使用像 [GRAS 42AG](#) 多功能声级校准器这样的校准设备。

为进行精确的灵敏度校准，我们建议使用像 [GRAS 42AP](#) 智能活塞发声器这样的活塞发声器。

校准

所有 GRAS 传声器在出厂时，都已在受控的实验室环境中使用可溯源的校准设备进行了校准。根据使用情况、测量环境和内部质量控制方案，我们建议每年至少对传声器进行一次重新校准。

我们提供两种校准作为可选的售后服务 GRAS 可溯源校准和 GRAS 认可校准。

GRAS 可溯源校准是由经过培训的人员在受控条件下，根据既定程序和标准执行的一种可溯源校准。这与所有 GRAS 传声器作为我们质量保证体系一部分所必须经过的严格校准是相同的。

GRAS 认可校准由 GRAS 认可校准实验室执行，该实验室已根据 ISO 17025 标准获得了 DANAK (丹麦认可基金) 的认可。

如果您希望新购买的传声器套件附带认可校准以替代默认的出厂校准，请在订购时指明。

在 [gras/calib](#) 了解更多信息。

质量与保修

所有 GRAS 传声器均由优质材料制成，可确保其终生的稳定性和坚固性。传声器均由在该领域拥有多年专业经验、技术娴熟且专注的操作员在经过验证的洁净室环境中组装而成。


传声器振膜、本体和经过改良的保护栅均由高等级不锈钢制成，这使其不仅能抵抗物理损伤，还能抵抗由腐蚀性空气或气体引起的腐蚀。

再加上经过加固的镀金传声器端子可确保高度可靠的连接，这使得 GRAS 能够提供 5 年保修，涵盖材料和工艺缺陷。

服务

如果您意外损坏了 GRAS 传声器的振膜，在大多数情况下，我们能以非常合理的成本和较短的周转时间为您更换。这不仅能保护您的投资，也能让您的质量保证部门满意，因为您无需担心新的序列号等问题。



| | | |
|---|---|-------------------------|
| Polarization/Connection | | 0 V / CCP |
| Frequency range (± 1 dB) | Hz | 10 to 25 k |
| Frequency range (± 2 dB) | Hz | 6.5 to 70 k |
| Frequency range (± 3 dB) | Hz | 6.5 to 140 k |
| Dynamic range lower limit (microphone thermal noise) | dB(A) | 49 |
| Dynamic range lower limit with GRAS preamplifier | dB(A) | 52 |
| Dynamic range upper limit | dB | 175 |
| Dynamic range upper limit with GRAS preamplifier @ +28 V / ± 14 V power supply | dB | 175 |
| Dynamic range upper limit with GRAS preamplifier @ +120 V / ± 60 V power supply | dB | 175 |
| Dynamic range upper limit with GRAS CCP preamplifier | dB | 175 |
| Open-circuit sensitivity @ 250 Hz (± 3 dB) | mV/Pa | 0.9 |
| Resonance frequency | kHz | 160 |
| Microphone cartridge capacitance, typ. | pF | 3.5 |
| Microphone venting | | Rear |
| IEC 61094-4 Compliance | | WS3P |
| Temperature range, operation | $^{\circ}\text{C} / ^{\circ}\text{F}$ | -40 to 120 / -40 to 248 |
| IEC 61094-4 Designation | | WS2F |
| Temperature range, storage | $^{\circ}\text{C} / ^{\circ}\text{F}$ | -40 to 85 / -40 to 185 |
| Temperature coefficient @250 Hz | dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$ | -0.01 / -0.006 |
| Humidity range non condensing | % RH | 0 to 90 |
| Static pressure coefficient @250 Hz | dB/kPa | -0.014 |
| Humidity coefficient @250 Hz | dB/% RH | -0.001 |
| Influence of axial vibration @1 m/s ² | dB re 20 μPa | 59 |
| CE/RoHS compliant/WEEE registered | | Yes / Yes, Yes |
| Weight | g / oz | 1.5 / 0.053 |

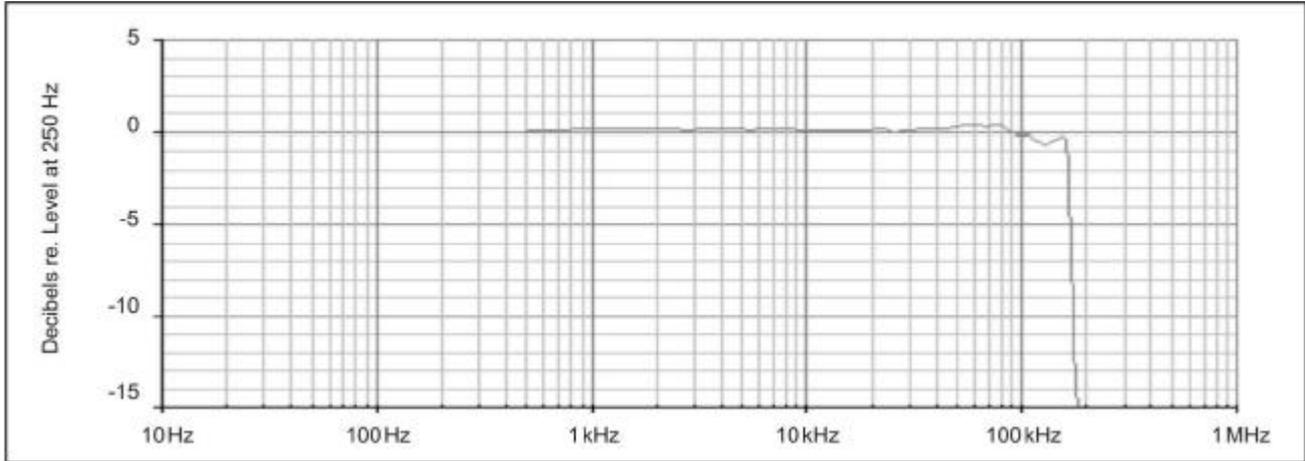

典型频率响应 (不带保护栅)。

GRAS Sound & Vibration 保留更改规格的权利，恕不另行通知。

Dimensions in mm

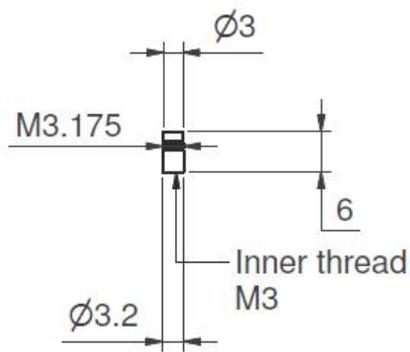

| | |
|--------------|---|
| GRAS 40DD | 1/8" 预极化压力场传声器。这是标准的后置通气孔版本 |
| GRAS 40DD-FV | 1/8" 预极化压力场传声器，前置通气孔型。与 40DD 相同，但为前置通气孔 |
| GRAS CA0001 | 传声器的可溯源校准 |
| GRAS CA2001 | 传声器的认可校准 |

GRAS Sound & Vibration 保留更改配件的权利，恕不另行通知。

GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.GRASacoustics.com
gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION
9290 SW Nimbus Avenue
Beaverton, OR 97008
Tel: 503-627-0832
Toll Free: 800-231-7350
www.GRASacoustics.com
sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0)7762 584 202
www.GRASacoustics.com
sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION
Room 502, Building T1,
No.1398 Ali Center
Shenchang Road,
Minhang District,
Shanghai, China, 201107
Tel: +86 21 400-888-9826
www.GRASacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.GRASacoustics.com

www.GRASacoustics.com

GRAS
An Axiometrix Solutions Brand