

GRAS 40AI

1/2" 外部极化声强传声器



Freq response: IEC 61043
Dyn range: 20 dB(A) to 157 dB
Sensitivity: 25 mV/Pa

40AI 是符合 IEC 61094 标准的 WS2F 1/2" 外部极化声强传声器对，特别适用于声强和声功率测量、声源定位和 IEC 61043 标准仪器。其对应的预极化版本是 [GRAS 40GI](#)

Introduction

The 40AI is an IEC 61094-compliant, WS2F ½" externally polarized sound-intensity microphone pair. Read about the prepolarized equivalent [40GI].

The 40AI microphone pair consists of two phase-matched free-field condenser microphones with extremely well-controlled phase characteristics for use in sound-intensity probes. Their standard mounting threads make them compatible with all the usual available makes of measurement-microphone preamplifiers.

As a microphone pair, the free-field frequency response of the 40AI complies with IEC 61043 1993 Class 1 and IEC 60651 Type 1.

Two 40AI microphones are included in 40AK microphone set, which is used in the GRAS LEMO Sound Intensity Probe Type 50AI.

40AI is individually factory-calibrated and delivered with a calibration chart stating its specific open-circuit sensitivity and pressure frequency response.

Typical applications and use

The 40AI is designed for sound-intensity and sound-power measurements, as well as sound-source localization, which is why it is included in the 50AI probe. Each 40AI microphone pair is phase matched according to the phase specifications for a Class 1 Sound Intensity Probe in accordance with international IEC 61043, Electroacoustics - Instruments for the Measurement of Sound Intensity - Measurements with Pairs of Pressure Sensing Microphones, 1993.

The quality of a sound intensity probe microphone is its ability to measure the real part of a complex sound intensity in highly reactive sound fields as well as in sound fields exposed to high levels of background noise. This ability depends largely on

the phase responses of the microphone pair. The individual phase matching of each 40AI ensures that any differences in phase responses are extremely small.

The 40AI is also used for ranking of sound sources. When mounted in a sound-intensity probe such as the 50AI, the microphones can pinpoint the area generating the most noise, which may then require additional measurements, depending on the measurement procedures and processes used. The sound-intensity microphones reveal the weak and strong points when identifying noise sources. Sound-source ranking is useful as long as the background noise doesn't exceed the noise source.

Compatibility

The 40AI requires a standardized ¼" LEMO preamplifier and an input module that supports this technology.

System verification

For daily verification and check of your measurement setup, we recommend using a calibrator like GRAS Sound Level Calibrator 42AB.

For proper sensitivity calibration, we recommend using a pistonphone like GRAS Intelligent Pistonphone 42AP. 40AI cannot be calibrated with the 51AC-S1 Sound Intensity Calibration Adapter.

Calibration

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment and internal quality control programs we recommend that the microphone is recalibrated at least once a year.

We offer two kinds of calibration as an optional

after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration in stead of the default factory calibration, specify this when ordering.

Learn more at [gras/calib](https://www.gras.com/calib).

Quality and warranty

All GRAS microphones are made of high-quality materials that will ensure life-long stability and robustness. The microphones are all assembled in verified clean-room environments by skilled and dedicated operators with many years of expertise in this field.

The microphone diaphragm, body, and improved protection grid are made of high-grade stainless steel, which makes the microphone resistant to physical damage, as well as corrosion caused by aggressive air or gasses.

This, combined with the reinforced gold-plated microphone terminal which guarantees a highly reliable connection, enables GRAS to offer 5 years warranty against defective materials and workmanship.

Service

If you accidentally damage the diaphragm on a GRAS microphone, we can – in most cases – replace it at a very reasonable cost and with a short turn-around time. This not only protects your investment, but also pleases your quality assurance department because you don't have to worry about new serial numbers, etc.


| | | |
|---|---|-------------------------|
| Polarization/Connection | | 0 V / CCP |
| Frequency range (± 1 dB) | Hz | 50 Hz - 8 kHz. |
| Frequency range (± 2 dB) | Hz | 10 Hz - 20 kHz |
| Dynamic range lower limit (microphone thermal noise) | dB(A) | 20 |
| Dynamic range upper limit | dB | 152 |
| Dynamic range upper limit with GRAS preamplifier @ +28 V / ± 14 V power supply | dB | 145 |
| Dynamic range upper limit with GRAS preamplifier @ +120 V / ± 60 V power supply | dB | 157 |
| Set sensitivity @ 250 Hz (± 1 dB) | mV/Pa | 25 |
| Set sensitivity @ 250 Hz (± 1 dB) | dB re 1V/Pa | -32 |
| IEC 61094-4 Compliance | | WS3P |
| Temperature range, operation | $^{\circ}\text{C}$ / $^{\circ}\text{F}$ | -40 to 150 / -40 to 320 |
| Temperature range, storage | $^{\circ}\text{C}$ / $^{\circ}\text{F}$ | -40 to 85 / -40 to 185 |
| Temperature coefficient @250 Hz | dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$ | -0.01 / -0.006 |
| Static pressure coefficient @250 Hz | dB/kPa | -0.007 |
| Humidity range non condensing | % RH | 0 to 100 |
| Humidity coefficient @250 Hz | dB/% RH | -0.001 |
| Influence of magnetic field @80 A/m, 50 Hz | dB re 20 μPa | 34 |
| Influence of axial vibration @1 m/s ² | dB re 20 μPa | 62 |
| CE/RoHS compliant/WEEE registered | | Yes / Yes / Yes |
| Weight | g / oz | 10 / 0.353 |

Sound Intensity Microphone Pair Type 40AI fulfills the phase requirements of a Class 1 Sound Intensity Probe in accordance with IEC International Standard 61043.

- Difference in phase response: From 50 Hz to 250 Hz < 0.05°
- From 250 Hz to 6.3 kHz < $f/5000^{\circ}$
- Difference in amplitude response (normalised at 250 Hz):
 From 20 Hz to 1 kHz < 0.2 dB
 From 20 Hz to 5 kHz < 0.4 dB
- Difference in sensitivity at 250 Hz: < 1dB
 Difference in polarized capacity: < 0.6 pF

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Dimensions in mm.

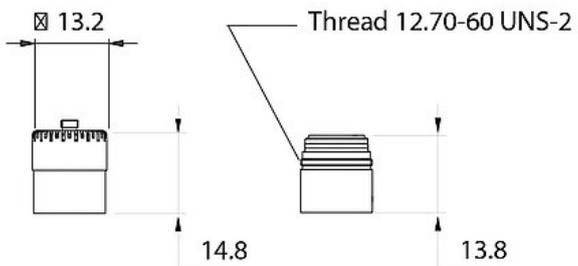

Optional items

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

| | |
|---------------------------|--|
| GRAS 26AK | 1/2" Standard Preamp with Integrated Connector |
| GRAS 42AG | Multifunction Sound Calibrator |
| GRAS 42AP | Intelligent Pistonphone, Class 0 |
| GRAS CA0001 | Traceable Calibration of Microphone |
| GRAS CA2001 | Accredited Calibration of Microphone |

GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.GRASacoustics.com
gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION
9290 SW Nimbus Avenue
Beaverton, OR 97008
Tel: 503-627-0832
Toll Free: 800-231-7350
www.GRASacoustics.com
sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0)7762 584 202
www.GRASacoustics.com
sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION
Room 502, Building T1,
No.1398 Ali Center
Shenchang Road,
Minhang District,
Shanghai, China, 201107
Tel: +86 21 400-888-9826
www.GRASacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.GRASacoustics.com

www.GRASacoustics.com

GRAS
An Axiometrix Solutions Brand