GRAS 40HT





GRAS 40HT ½" GRAS 40HH

Freq range: 10 Hz to 16 kHz Dyn range: 6.5 dB(A) to 113 dB Sensitivity: 800 mV/Pa



Technology

Introduction

GRAS 40HT can measure sound pressure levels below the threshold of human hearing; and is amply suitable for sound-power measurements on even very quiet products. Its very wide dynamic range permits measurements down to below – 2 dB re.20 µPa (in 1/3-octave bands) from 20 Hz to 20 kHz.

Typical applications and use

40 HT is for low sound pressure measurements and very low sound power measurements.

Design

40HT comprises a special high-sensitive ½-inch Condenser Microphone GRAS 40AH, a ¼-inch High-impedance Preamplifier GRAS 26HG with adapter GRAS GR0010 for the ½-inch microphone, and special Gain and Filter Unit GRAS 26HT.

The Gain and Filter Unit and Microphone are an individually-matched combination. To complete the system, a special single or 10-channel power module (available from GRAS) is required, i.e. <u>GRAS 12HF</u> for single-channel measurements or <u>GRAS 12HM</u> for 1 to 10 channel measurements.

Each channel provides all voltages required for 40HT and polarizing its microphone.

The Gain and Filter Unit GRAS 26HT has a built-in overload indicator (which is repeated on the chosen power supply) and a frequency correction facility for both pressure-microphone operation as well as free-field microphone operation.

Microphone

The GRAS 40AH microphone is an externally polarized microphone with a specially reduced inherent noise floor in order to achieve a high dynamic range and wide frequency range. Its diaphragm is specially tuned to yield high sensitivity

coupled with low internal-noise generation.


Frequency response and noise floor

The chosen power supply has a two-position switchfor selecting which microphone operation to use, i.e.pressure or free-field. A typical free-field response for an angle of incidence of 0° is shown in the data sheet when the 40HT is switched to free-field operation. Also shown is a complete low-noise measuring system, a typical noise floor in 1/3-octave bands for both the linear and A-weighted cases.




Specifications

Frequency range (±1 dB)	Hz	12.5 to 10 k
Frequency range (±2 dB)	Hz	10 to 16 k
Frequency range (±3 dB)	Hz	6 to 20 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	6.5
Dynamic range upper limit	dB	113
Set sensitivity @ 250 Hz (±2 dB)	mV/Pa	800
Polarization voltage	V	200 V / Traditional
Microphone venting		Rear
Output impedance	Ω	47
Output impedance Temperature range, operation	Ω °C / °F	
		47

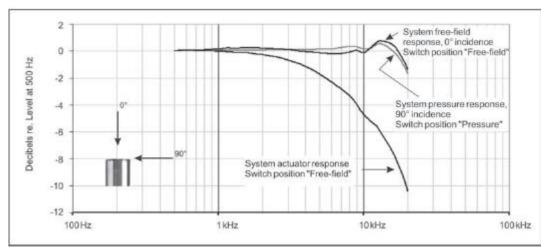

Typical frequency response

Specifications

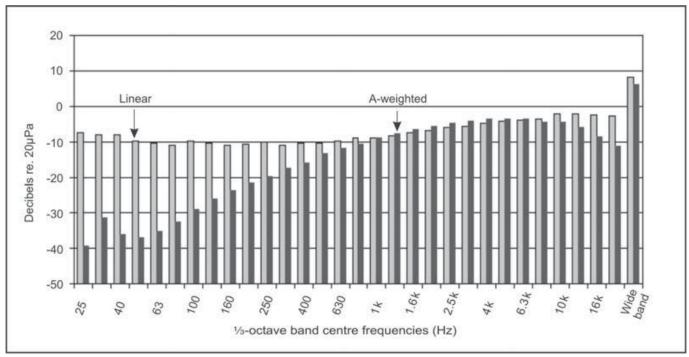

Typical noise floor

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Ordering info

Included items

GRAS 40AH	High sensitive 1/2" microphone
GRAS 26HT	Gain and filter unit
GRAS 26HG	Lownoise 1/4" preamplifier with adapter for the 1/2" microphone

Optional items

GRAS 12HF	1-Channel Power Module for Lownoise Systems
GRAS 12HM	10-Channel Power Module for Lownoise Systems
GRAS AM0069	Windscreen for 1/2" Microphones
GRAS 42AA	Pistonphone, Class 1
GRAS RA0090	Pistonphone Coupler
GRAS AL0006	Tripod
<u>GRAS RA0096</u>	Adjustable, high quality, stainless steel tripod adapter
GRAS AA0046	3 m LEMO 7-pin - LEMO 7-pin Cable for Low-noise measuring system
GRAS AA0047	10 m LEMO 7-pin - LEMO 7-pin Cable for Low-noise measuring system

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.



GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION

Skovlytoften 33 2840 Holte Denmark Tel: +45 4566 4046 www.GRASacoustics.com gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue Beaverton, OR 97008 Tel: 503-627-0832 Toll Free: 800-231-7350 www.GRASacoustics.com sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION

Unit 115, Gibson House, Ermine Business Park, Huntingdon, Cambridgeshire, PE29 6XU Tel: +44 (0) 7762 584 202 www.GRASacoustics.com sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1) Lane683, Shenhong Rd, Minhang District, Shanghai, China, 201107 Tel: +86 21 64203370 www.GRASacoustics.cn cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

GRAS

An Axiometrix Solutions Brand

grasacoustics.com