

# GRAS 50GI

CCP 声强探头



Freq range: Ref. IEC 61043 Class 1  
Dyn range: 27 dB(A) to 146  
Sensitivity: 12.5 mV/Pa

GRAS 50GI 是一种声强探头，用于直接连接信号分析仪或带有 IEPE 输入的数据采集设备。探头包括一对相位匹配的预极化精密传声器，符合 IEC 标准 61043 对 1 级声强探头的要求。坚固耐用的小型 1/4" CCP 前置放大器可确保将声场干扰降至最低，从而在全频率范围内进行精确测量。

## Typical applications and use

- Sound intensity measurements
- Sound source location
- Sound power measurements
- IEC 61043 standard measurements
- Sound source ranking
- Sound intensity mapping

## Design

The probe set includes solid interchangeable spacers for microphone separations from 12 mm to 100 mm so that the probe can cover the frequency range from 50 Hz to 10 kHz.

All components are made specifically for sound intensity applications. Each small 1/4" diameter by 40 mm long microphone preamplifier is housed in a robust stainless steel casing, which enables novel probe designs for reducing disturbances to the soundfield otherwise brought about by the effects of shadows and diffraction, and a symmetry which enables reliable calibrations as described in the proposed standard (ISO/DIS 9614-2) for sound power measurements using sound intensity measurements.

The CCP Intensity Probe GRAS 50GI comprises 40GK sound Intensity Microphone Pair, two 26CB CCP Microphone Preamplifiers, four solid spacers of various lengths, windscreen, and probe handle.


The Type 50GI is delivered in a carrying case as a ready-to-use kit, complete with all the above accessories.

The microphones are 1/2" free-field prepolarized microphones with a uniquely-designed pressure equalisation system which ensures extremely well defined phase characteristics.

The microphones and preamplifiers are mounted on

a swivel head on the telescopic arm of the handle. To cover the full frequency range from 50 Hz to 10 kHz, the 50GI probe is delivered with four solid spacers for spacing the microphones at 12 mm, 25 mm, 50 mm and 100 mm. These spacers can be easily interchanged without dismantling the probe.

Polarization/Connection		0 V / CCP
Frequency range ( $\pm 2$ dB)	Hz	Ref. IEC 61043 Class 1
Dynamic range lower limit (microphone thermal noise)	dB(A)	27
Dynamic range upper limit	dB	146
Set sensitivity @ 250 Hz ( $\pm 2$ dB)	mV/Pa	12.5
Microphone venting		Rear
Temperature range, operation	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	5 to 40 / 41 to 104
Temperature coefficient @250 Hz	dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$	-0.01
Humidity range non condensing	% RH	0 - 100
Humidity coefficient @250 Hz	dB/% RH	-0.001
Influence of axial vibration @1 m/s <sup>2</sup>	dB re 20 $\mu\text{Pa}$	66
Connector type		BNC
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	300 / 10.582

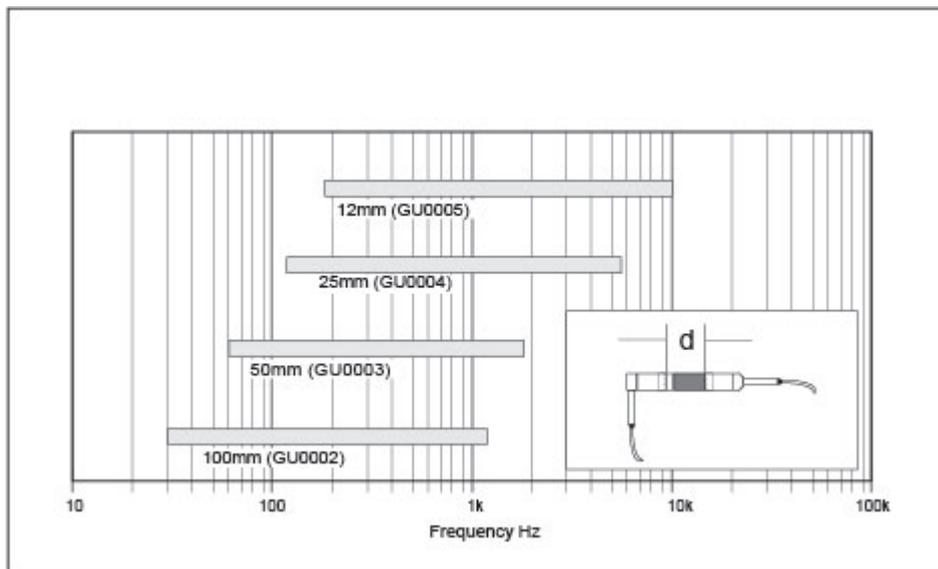

Frequency ranges for different microphone spacers

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

## Included items

---

<a href="#">GRAS 40GK</a>	1/2" Prepolarized Intensity Microphone Kit
<a href="#">GRAS 26CB Set</a>	1/4" CCP Standard Preamp with Microdot connector
<a href="#">GRAS AA0070</a>	3 m Microdot - BNC cable
GRAS AI0044	Probe handle
GRAS AI0001	Windscreen for Intensity Probes

## Optional accessories

---

<a href="#">GRAS 12AQ</a>	2-Channel Universal Power Module with signal conditioning and PC interface
<a href="#">GRAS 42AP</a>	Intelligent Pistonphone, Class 0
<a href="#">GRAS 51AB</a>	Phase Calibrator according to IEC 61043

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

## HEAD OFFICE, DENMARK

**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

## USA

**GRAS SOUND & VIBRATION**  
9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

## UK

**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0)7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

## CHINA

**GRAS SOUND & VIBRATION**  
Room 502, Building T1,  
No.1398 Ali Center  
Shenchang Road,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 400-888-9826  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.GRASacoustics.com](http://www.GRASacoustics.com)

[www.GRASacoustics.com](http://www.GRASacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand