GRAS 50AI-B

1/2" LEMO





Freq range: Ref. IEC 61043 Class 1 Dyn range: 25 dB(A) to 152 dB

Sensitivity: 25 mV/Pa

GRAS 50AI-B 20 61043 - -

1993 IEC



Technology

Typical applications

- · Sound-intensity measurements
- Sound-source location
- Sound-power measurements
- IEC 61043 standard measurements
- Sound-source ranking
- · Sound-intensity mapping

Design

All components are made specifically for sound intensity applications. Each small 1/4-inch diameter by 40 mm long microphone preamplifier is housed in a robust stainless steel casing, which enables novel probe designs for reducing disturbances to the soundfield otherwise brought about by the effects of shadows and diffraction, and a symmetry which enables reliable calibrations as described in the proposed standard (ISO/DIS 9614-2) for sound power measurements using sound-intensity measurements.

The Sound-intensity Probe Type 50Al comprises GRAS 40AK Intensity Microphone Kit, two GRAS 26AA Microphone Preamplifiers, four solid spacers of various lengths and remote-control handle.

The microphones are high sensitivity, free-field 1/2-inch condenser microphones with a uniquely designed pressure equalisation system which ensures extremely well defined phase characteristics. The microphones and preamplifiers are mounted on a swivel head on the telescopic arm of the Remote control handle. To cover the full frequency range from 50 Hz to 10 kHz, the 50Al probes are delivered with four solid spacers for spacing the microphones at 12 mm, 25 mm, 50 mm and 100 mm. These spacers can be easily interchanged without dismantling the probe.

The 50Al can alternatively be supplied with a pair of phase-matched GRAS 40Bl 1/4" microphones for

measuring very high intensity levels which lie above the dynamic range of the 40AK or in situations where the smaller size of the 40BI is necessary.

Different versions of the GRAS 50Al are available for connecting directly to a wide range of general purpose frequency analysers as well as specialised sound intensity analysers.

The 50Al-B comes with built-in remote control functions for direct connection to, and control of, sound-intensity measuring systems from a wide range of suppliers such as 01 dB, Müller-BBM and Neutrix-Cortex

The alternate C-version can be connected to any analyser with standard 7-pin LEMO microphone inputs whereas the D-version has built-in remote control functions enabled by internal batteries for direct connection to, and control of, sound-intensity measuring systems from a wide range of suppliers such as 01 dB. Müller-BBM and Neutrix-Cortex

All versions are delivered in a carrying case, complete with microphones, preamplifiers, mechanical parts, windscreen and remote control handle. Special configurations can also be made to order.




Specifications

Frequency range (±2 dB)	Hz	Ref. IEC 61043 Class 1
Dynamic range lower limit (microphone thermal noise)	dB(A)	25
Dynamic range upper limit	dB	152
Set sensitivity @ 250 Hz (±2 dB)	mV/Pa	25
Polarization voltage	V	200V
Microphone venting		Rear
Temperature range, operation	°C / °F	5 to 40 / 41 to 104
Temperature coefficient @250 Hz	dB/°C / dB/°F	-0.01
Humidity range non condensing	% RH	0 - 100
Humidity coefficient @250 Hz	dB/% RH	-0.001
Influence of axial vibration @1 m/s²	dB re 20 μPa	66
Connector type		12-pin LEMO
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	400 / 14.110



Specifications

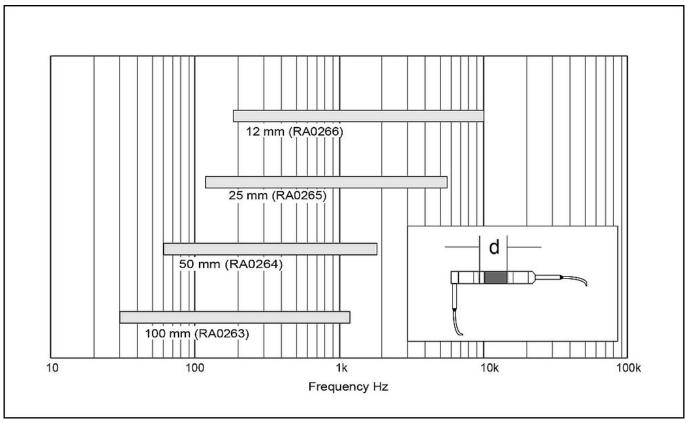

Frequency ranges for different microphone spacers

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Ordering info

Included items

GRAS AI0001	Windscreen for Intensity Probes
	Carrying case

Optional accessories

GRAS 42AG	Multifunction Sound Calibrator, Class 1
GRAS 51AB	Phase Calibrator according to IEC 61043

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.



GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION

Skovlytoften 33 2840 Holte Denmark Tel: +45 4566 4046 www.GRASacoustics.com gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue Beaverton, OR 97008 Tel: 503-627-0832 Toll Free: 800-231-7350 www.GRASacoustics.com sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION

Unit 115, Gibson House, Ermine Business Park, Huntingdon, Cambridgeshire, PE29 6XU Tel: +44 (0) 7762 584 202 www.GRASacoustics.com sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1) Lane683, Shenhong Rd, Minhang District, Shanghai, China, 201107 Tel: +86 21 64203370 www.GRASacoustics.cn cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

GRAS

An Axiometrix Solutions Brand

grasacoustics.com