

GRAS 50AI-D

1/2" LEMO 声强探头



Freq range: Ref. IEC 61043 Class 1
Dyn range: 25 dB(A) to 152 dB
Sensitivity: 25 mV/Pa

GRAS 50AI-D 声强探头基于 20 多年的声强测量理论和实践经验。它可调、耐用，完全符合 1993 年 IEC 61043 电声-声强测量仪器-使用成对压力传声器进行测量》中对 1 类声强探头的要求。

Typical applications

- Sound-intensity measurements
- Sound-source location
- Sound-power measurements
- IEC 61043 standard measurements
- Sound-source ranking
- Sound-intensity mapping

Design

All components are made specifically for sound intensity applications. Each small 1/4-inch diameter by 40 mm long microphone preamplifier is housed in a robust stainless steel casing, which enables novel probe designs for reducing disturbances to the soundfield otherwise brought about by the effects of shadows and diffraction, and a symmetry which enables reliable calibrations as described in the proposed standard (ISO/DIS 9614-2) for sound power measurements using sound-intensity measurements.

The Sound-intensity Probe Type 50AI comprises [GRAS 40AK](#) Intensity Microphone Kit, two [GRAS 26AA](#) Microphone Preamplifiers, four solid spacers of various lengths and remote-control handle.

The microphones are high sensitivity, free-field 1/2-inch condenser microphones with a uniquely designed pressure equalisation system which ensures extremely well defined phase characteristics. The microphones and preamplifiers are mounted on a swivel head on the telescopic arm of the Remote control handle. To cover the full frequency range from 50 Hz to 10 kHz, the 50AI probes are delivered with four solid spacers for spacing the microphones at 12 mm, 25 mm, 50 mm and 100 mm. These spacers can be easily interchanged without dismantling the probe.

The 50AI can alternatively be supplied with a pair of phase-matched [GRAS 40BI](#) 1/4" microphones for

measuring very high intensity levels which lie above the dynamic range of the 40AK or in situations where the smaller size of the 40BI is necessary.

Different versions of the Type 50AI are available for connecting directly to a wide range of general purpose frequency analysers as well as specialised sound intensity analysers.

Version B


has built-in remote control functions for direct connection to, and control of, sound-intensity measuring systems from a wide range of suppliers such as 01 dB, Müller-BBM and Neutrix-Cortex

Version C

can be connected to any analyser with standard 7-pin LEMO microphone inputs

All versions are delivered in a carrying case, complete with microphones, preamplifiers, mechanical parts, windscreen and remote control handle. Special configurations can also be made to order.

Frequency range (± 2 dB)	Hz	Ref. IEC 61043 Class 1
Dynamic range lower limit (microphone thermal noise)	dB(A)	25
Dynamic range upper limit	dB	152
Set sensitivity @ 250 Hz (± 2 dB)	mV/Pa	25
Polarization voltage	V	200V
Microphone venting		Rear
Temperature range, operation	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	5 to 40 / 41 to 104
Temperature coefficient @250 Hz	dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$	-0.01
Humidity range non condensing	% RH	0 - 100
Humidity coefficient @250 Hz	dB/% RH	-0.001
Influence of axial vibration @1 m/s ²	dB re 20 μPa	66
Connector type		3 m 7-pin LEMO
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	400 / 14.110

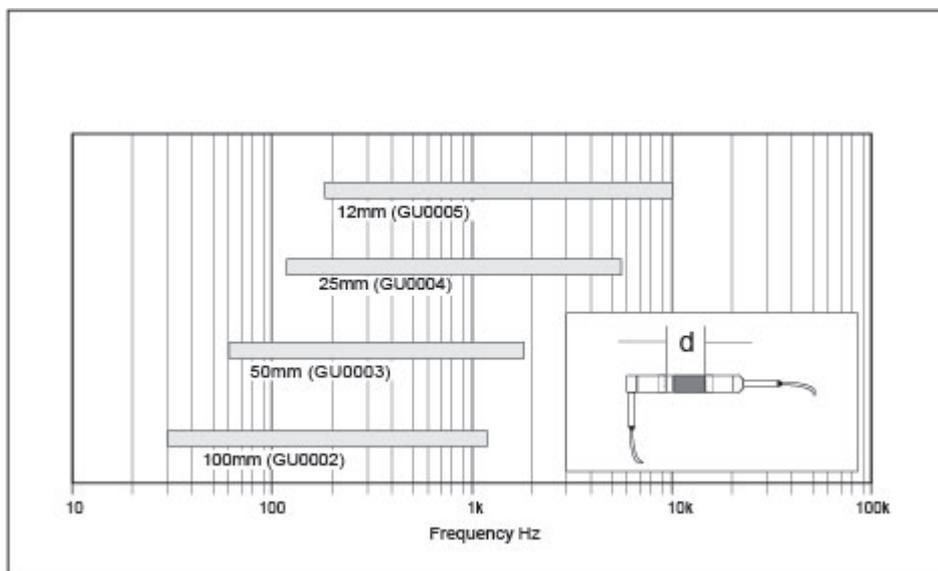

Frequency ranges for different microphone spacers

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Included items

GRAS AI0001	Windscreen for Intensity Probes
	Carrying case

Optional accessories

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.GRASacoustics.com
gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION
9290 SW Nimbus Avenue
Beaverton, OR 97008
Tel: 503-627-0832
Toll Free: 800-231-7350
www.GRASacoustics.com
sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0)7762 584 202
www.GRASacoustics.com
sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION
Room 502, Building T1,
No.1398 Ali Center
Shenchang Road,
Minhang District,
Shanghai, China, 201107
Tel: +86 21 400-888-9826
www.GRASacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.GRASacoustics.com

www.GRASacoustics.com

GRAS
An Axiometrix Solutions Brand