

GRAS RA0401



100 Hz - 10 kHz IEC 60318-4
10 kHz - 20 kHz ± 2.2 dB
@ 13.5 kHz
1260 mm³ @ 500 Hz IEC 60318-4
12.5 mV/Pa
ITU-T Rec P.57

GRAS RA0401

20 kHz

40AG 1/2
[RA0402](#)



GRAS RA0401

60318-4

10 kHz	10 kHz	13.5 kHz
Q	10 kHz	

GRAS	13.5 kHz	20
kHz		

IEC 60318-4	IEC 60318-4	10 kHz	20
kHz	±2.2 dB	THD	ITU-T
P.57			

GRAS RA0402



• IEC 60318-4

• 10 kHz - 20 kHz ±2.2 dB

• 13.5 kHz 14 dB



• 10 kHz	—10 kHz	/
• 10 kHz		
• 3-5 kHz		

• IEC 60318-4

• ITU-T P.57 (08/96) P



RA0401

GRAS 40AG 1/2


13.5 kHz	Q	14 dB
----------	---	-------

20 kHz

GRAS 60318-4 vs. RA0401


RA0045 RA0401

RA0045 60318-4 1

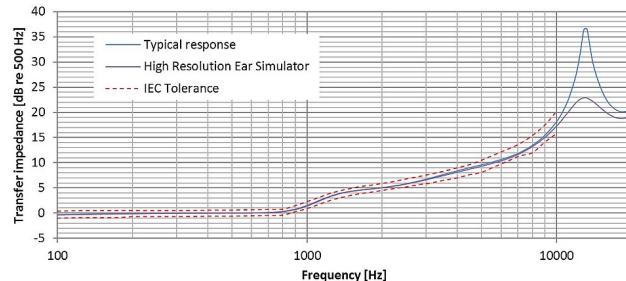

1. 60318-4

IEC GRAS 10 kHz - 20 kHz 2

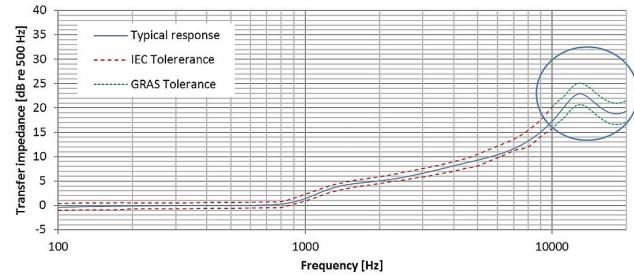

2. RA0401 IEC GRAS

36 dB RA0401 14 dB
RA0401

GRAS RA0401

GRAS

KEMAR

KEMAR

RA0045 KEMAR

•

- RA0401
- RA0401 45CA /

GRAS 43 0000000000

RA0401 RA0045 43AC 43AE
43AG

[GRAS 43AC](#), [GRAS 43AE](#), [GRAS 43AG](#)

000000000000

ITU-T P.57 GRAS

000

RA0401 LEMO [GRAS 26AK](#) 1/2
[GRAS 26AC-1](#) 1/4 1/4 RA0003
RA0001

RA0045 RA0401

- [GRAS RA0056](#)
- [GRAS RA0057](#)

IEC 60318-4

GRAS

000
10 kHz
60318-4 10 kHz

IEC --

60318-4 60711


000000000000
60318-4 13.5
kHz 10 kHz
 $\frac{1}{4}$
RA0401 10 kHz

RA0401

RA0401 KEMAR

Polarization/Connection		200 V / Traditional
Theoretical dynamic range lower limit with GRAS preamplifier	dB(A)	25
Theoretical dynamic range upper limit with GRAS preamplifier @ +28 V / ±14 V power supply	dB	153
Theoretical dynamic range upper limit with GRAS preamplifier @ +120 V / ±60 V power supply	dB	164
Set sensitivity @ 250 Hz (±3 dB)	mV/Pa	12.5
Set sensitivity @ 250 Hz (±3 dB)	dB re 1V/Pa	-38
Resonance frequency	kHz	13.5
Coupler volume	mm ³	1260 @ 500 Hz
Temperature range, operation	°C / °F	-30 to 60 / -22 to 140
Temperature coefficient @250 Hz	dB/°C / dB/°F	0.05
Humidity range non condensing	% RH	0 to 90
ANSI standard		S3.7
IEC standard		60318-4 (former 60711)
ITU-T recommendations		P.57
CE/RoHS compliant/WEEE registered		Yes/Yes, Yes
Weight	g / oz	52 / 1.8

Dimensions in mm

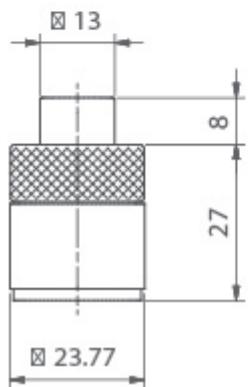



<u>GRAS RA0088</u>	
GRAS GR0433	
GRAS GR0434	
GRAS GR0436	
GRAS GR0437	
GRAS GR0438	
GRAS GR0440	
<u>GRAS RA0056</u>	
<u>GRAS RA0057</u>	
<u>GRAS 26AK</u>	26AK 1/2
<u>GRAS 26AC-1</u>	26AC-1 1/4
GRAS RA0001	1/2 1/4
GRAS RA0003	1/2 1/4

GRAS Sound & Vibration

GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.GRASacoustics.com
gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION
9290 SW Nimbus Avenue
Beaverton, OR 97008
Tel: 503-627-0832
Toll Free: 800-231-7350
www.GRASacoustics.com
sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0) 7762 584 202
www.GRASacoustics.com
sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION
Room 315, RuiBo Center(T1)
Lane683, Shenhong Rd,
Minhang District,
Shanghai, China, 201107
Tel: +86 21 64203370
www.GRASacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require. GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

grasacoustics.com

GRAS
An Axiometrix Solutions Brand