

# GRAS 43AC-S7

CCP



0 V/CCP  
1260 mm<sup>3</sup> @ 500 Hz  
44 dB(A) - 166 dB  
ANSI S3.7  
IEC 60318-4

TEDS GRAS 43AC-S7  
kHz

50

## GRAS 43AC-S7

- IEC 60318-4

43AC-S7 RA0404 50 kHz RA0404

## 43AC-S7


- [GRAS RA0404](#)
- [GRAS 40BD](#) 1/4 ( RA0404 )
- [GRAS 26CB](#) 1/4
- [GRAS RA0001](#)
- [GRAS RA0052](#)

[GRAS 43AC-S6](#)

## **TEDS** □□□

43AC-S7 IEEE 1451.4 TEDS v. 1.0  
(TEDS)

Theoretical dynamic range lower limit with GRAS preamplifier	dB(A)	44
Theoretical dynamic range upper limit with GRAS preamplifier @ +28 V / $\pm 14$ V power supply	dB	166
Set sensitivity @ 250 Hz ( $\pm 3$ dB)	mV/Pa	1,6
Coupler volume	mm <sup>3</sup>	1260 @ 500 Hz
Resonance frequency	kHz	13.5
Temperature range, operation	°C / °F	-30 to 60 / -22 to 140
Temperature coefficient @250 Hz	dB/°C / dB/°F	-0.01 / -0.006
Humidity range non condensing	% RH	0 to 75
ANSI standard		S3.7
IEC standard		60318-4 (former 60711)
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Connector type		Microdot 10/32
Weight	g / oz	1550 / 54.675

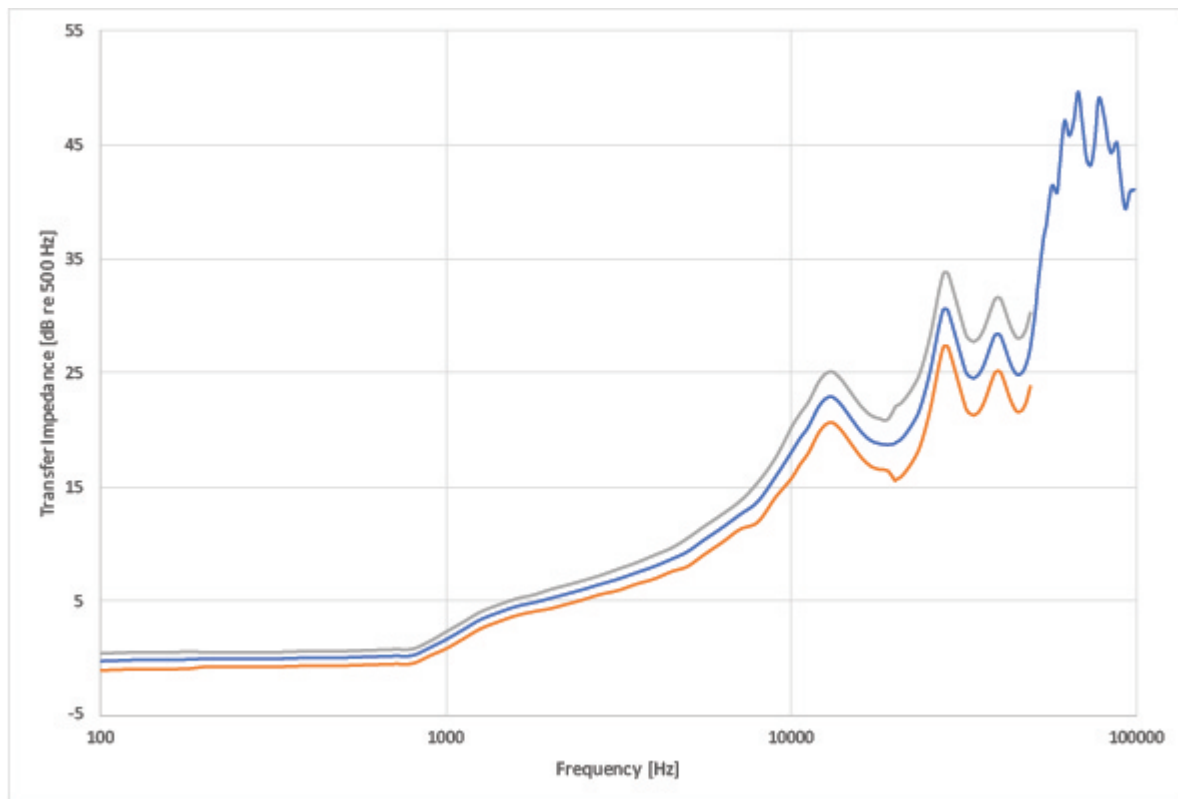

1. RA0404      10 kHz      IEC 60318-4      10 kHz      50 kHz





<a href="#">GRAS RA0404</a>	( )
<a href="#">GRAS 26CB</a>	¼
GRAS RA0001	
<a href="#">GRAS RA0052</a>	
GRAS GR0435	
GRAS GR0436	
GRAS GR0437	
GRAS GR0438	
GRAS GR0440	
GRAS GR0433	
GRAS GR0434	
GRAS MI0070	0.2 m



<a href="#">GRAS 12AK</a>	
<a href="#">GRAS 42AA</a>	



<a href="#">GRAS RA0196</a>	( )
-----------------------------	-----

GRAS Sound & Vibration

# GRAS Worldwide

Subsidiaries and distributors in more  
than 40 countries

**HEAD OFFICE, DENMARK**  
**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

**USA**  
**GRAS SOUND & VIBRATION**  
9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

**UK**  
**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

**CHINA**  
**GRAS SOUND & VIBRATION**  
Room 315, RuiBo Center(T1)  
Lane683, Shenhong Rd,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 64203370  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand