

# GRAS 47AX

1/2" CCP Flush-mount Microphone Set



Freq range: 3.15 Hz to 20 kHz  
Dyn range: 22 dB(A) to 150 dB  
Sensitivity: 12.5 mV/Pa

The GRAS 47AX 1/2" CCP Flush-Mount Microphone Set is a low profile 1/2" precision pressure microphone with built-in CCP preamplifier.

GRAS Sound & Vibration  
Skovlytoften 33, 2840 Holte, Denmark  
[www.grasacoustics.com](http://www.grasacoustics.com)



## Typical applications and use

- Flush mounting in confined spaces
- Flush mounting in clay models
- Ground array measurements
- General noise measurements

## Design

With a height (to the diaphragm) of only 8 mm, 47AX is suitably designed for flush mounting in plates in ground array applications and other applications with size constraints.

The microphone is a prepolarized pressure microphone with a dynamic range from 22 dB to 146 dB and a frequency range from 3.15 Hz to 20 kHz. The built-in preamplifier is a low noise constant current power (CCP) type, with a built-in TEDS circuit for automatic transducer identification. The set has an integrated 1.5 m cable with Microdot connector plus an adapter for BNC cable.

Flush-mounting is ideal where holes can be made in the structure, such as a clay model, to accommodate the front-vented 47AX. A rear-vented version is also available, the 47AX-S1.

It is included with the [GRAS 67AX](#) Ground Array Set, which has a 400 mm diameter mounting plate.

The 47AX is based on the IEC 61094 standard for measurement microphones.

## Calibration

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment and internal quality control programs we recommend that the microphone is recalibrated at least once a year.

We offer two kinds of calibration as an optional

after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration in stead of the default factory calibration, specify this when ordering.

Learn more at [gras/calib](https://gras.com/calib).

## Quality and warranty

GRAS microphone sets are made of components from our proven standard portfolio and are all manufactured of high-quality material and branded parts that were chosen and processed to ensure life-long stability and robustness.


All parts are manufactured and assembled at the factory in Denmark by skilled and dedicated operators in a verified clean-room environment. The microphone diaphragm, body and unique protection grid are made of high-grade stainless steel and make the microphone set resistant to physical damage as well as corrosion caused by aggressive air or gasses.

This, together with the enforced gold-plated microphone terminal guarantees a highly reliable connection. Thanks to the high quality, our warranty against defective materials and workmanship is 5 years.

## Service

Should you by mistake damage the diaphragm on a GRAS microphone we will in most cases be able to exchange it at a very reasonable cost and short turn-around time. This not only protects your investment but also meets your quality assurance department since you do not have to worry about new serial numbers etc.



|  |   |                              |
|--|---|------------------------------|
| Polarization/Connection                              |   | 0 V / CCP                    |
| Frequency range ( $\pm 1$ dB)                        | Hz  | 5 to 12.5 k                  |
| Frequency range ( $\pm 2$ dB)                        | Hz  | 3.15 to 20 k                 |
| Dynamic range lower limit with GRAS preamplifier     | dB(A)   | 22                           |
| Dynamic range upper limit with GRAS CCP preamplifier | dB  | 150                          |
| Set sensitivity @ 250 Hz ( $\pm 2$ dB)               | mV/Pa   | 12.5                         |
| Power supply (Constant Current Power)                | mA  | 2 to 10                      |
| Microphone venting                                   |   | Front                        |
| IEC 61094-4 Compliance                               |   | WS3P                         |
| Output impedance                                     | $\Omega$  | <50                          |
| Temperature range, operation                         | $^{\circ}\text{C}$ / $^{\circ}\text{F}$         | -30 to 70 / -22 to 158       |
| Temperature range, storage                           | $^{\circ}\text{C}$ / $^{\circ}\text{F}$         | -40 to 85 / -40 to 185       |
| Temperature coefficient @250 Hz                      | dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$ | -0.01 dB/ $^{\circ}\text{C}$ |
| Static pressure coefficient @250 Hz                  | dB/kPa  | -0.008                       |
| Humidity range non condensing                        | % RH  | 0 to 90                      |
| Humidity coefficient @250 Hz                         | dB/% RH   | <0.001                       |
| Influence of axial vibration @1 m/s <sup>2</sup>     | dB re 20 $\mu\text{Pa}$                         | 66                           |
| TEDS UTID (IEEE 1451.4)                              |   | 27 v. 1.0                    |
| Connector type                                       |   | Microdot 10/32               |
| CE/RoHS compliant/WEEE registered                    |   | Yes/Yes/Yes                  |
| Weight   | g / oz  | 9 / 0.317                    |

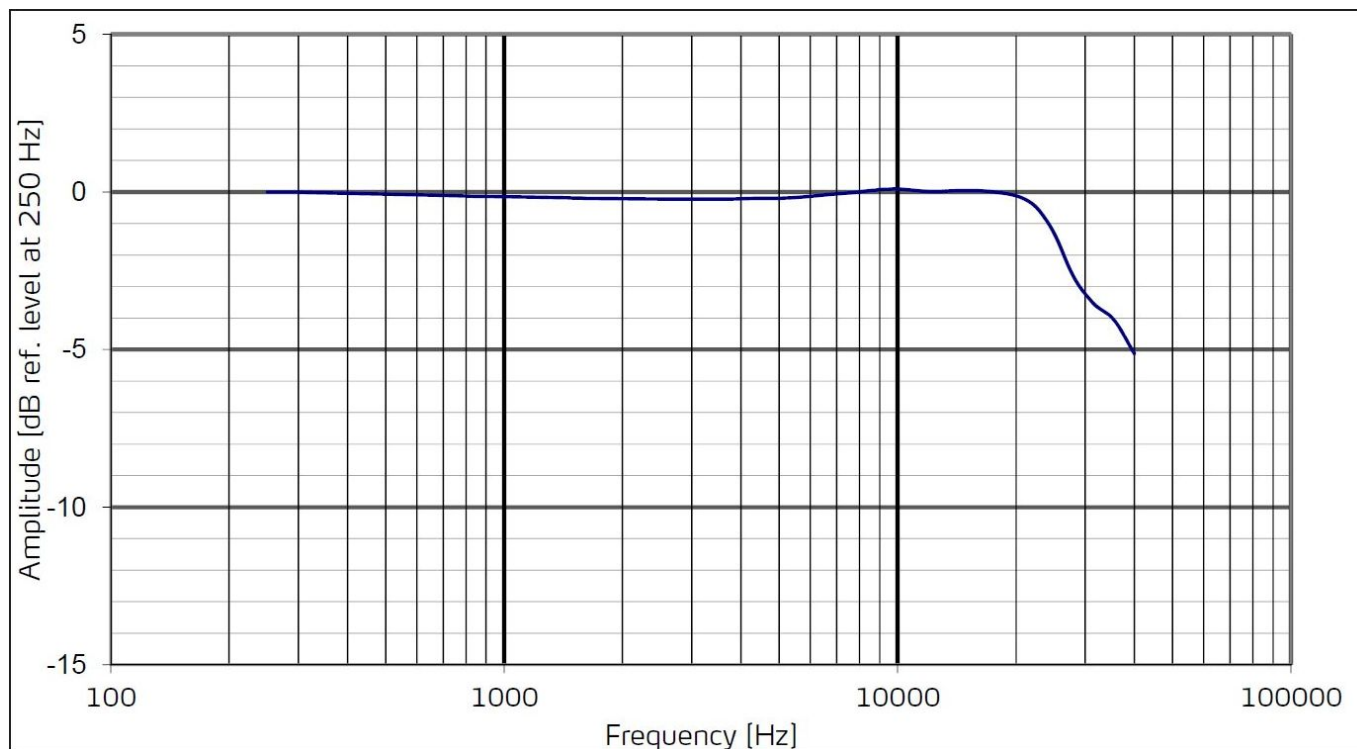

*Typical frequency response*

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Dimensions in mm

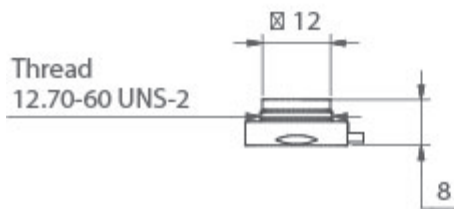

GS0523  
47AD  
47AX

All dimensions in mm.



## Included items

|             |                             |
|-------------|-----------------------------|
| GRAS AE0046 | Microdot - BNC male adapter |
|-------------|-----------------------------|

## Optional items

|                             |  |
|-----------------------------|--|
| <a href="#">GRAS 12AL</a>   | 1-Channel CCP Power Module with A-weighting filter                   |
| <a href="#">GRAS 42AP</a>   | Intelligent pistonphone  |
| GRAS RA0221                 | Pistonphone Calibration Adapter for 1/2" Flush-mount Microphone Sets |
| <a href="#">GRAS RA0501</a> | Mounting Adapter for 1/2" Flush-mount Microphone Set                 |
| <a href="#">GRAS RA0302</a> | Removal Tool for 1/2" & 1/4" Flush-mount Microphones                 |
| GRAS AE0074                 | BNC male to female adapter   |
| <a href="#">GRAS AA0035</a> | 3 m BNC - BNC Cable  |
| <a href="#">GRAS AA0037</a> | 10 m BNC - BNC Cable   |
| GRAS CA0029                 | Traceable Calibration of Microphone Set                              |
| GRAS CA2301                 | Accredited Calibration of Microphone Set                             |

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more  
than 40 countries

## HEAD OFFICE, DENMARK

### GRAS SOUND & VIBRATION

Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

## USA

### GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

## UK

### GRAS SOUND & VIBRATION

Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

## CHINA

### GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1)  
Lane683, Shenhong Rd,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 64203370  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand