

# GRAS 12AU

1-Channel Universal Power Module with signal conditioning and power amplifier



Connection: Traditional 200 V / CCP  
Channel(s): 1

The GRAS 12AU is a supply and conditioning amplifier for simultaneously powering a preamplifier for a condenser microphone and an amplifier for a loudspeaker. It is ideally suited for automated production line testing of micro speakers and mobile devices with built-in speaker.



Electroacoustic tests of:

- Telephones
- Hearing aids
- Loudspeakers
- Portable devices, for example, tablets, GPS, etc.



It is designed for automated production line testing of key loudspeaker parameters, such as frequency response, rub and buzz, THD, and impedance. The 12AU's design makes it ideally suited for test of portable devices with built-in loudspeaker such as mobile phones, hearing aids, tablets, and GPS devices.

The inherent noise is very low, and by design, it avoids system-generated noise, for example from ground loops. In a measurement setup, it controls the paths of (a) the signal sent out to the loudspeaker and (b) the resulting acoustic signal picked up by a condenser microphone fitted to the preamplifier.

It is remotely controlled via its USB interface and is delivered with a control program for Microsoft Windows ®.

12AU

115 V 230 V



- Single-channel conditioning amplifier suited for both CCP and 200 V LEMO preamplifiers
- Very low inherent noise
- The speaker input and the analog outputs are floating with respect to common ground to avoid system-generated noise

- Speaker amplifier with measurement of loudspeaker impedance without disturbing the speaker
- Fulfils EMC requirements according to EU regulations
- Full remote control via USB interface
- Gain settings:
  - Microphone conditioner: 0 to 50 dB in 10 dB steps
  - Speaker amplifier: -20 dB to +10 dB in 10 dB steps
  - Current output: 0 dB and +20 dB
- Filters:
  - Microphone amplifier: 1 Hz or 20 Hz
  - Speaker amplifier: DC or AC coupling (10 Hz)
- Comprehensive status and overload indication
- Rack-mountable in 19" rack.

## Measurement Control with 12AU

In a complex measurement setup, it is often difficult to avoid system-generated noise. Also, it can be tedious to correctly set up all the parameters of the measurement chain with respect to sensitivity, gain, filtering and overload handling.

With the 12AU, you can control the loudspeaker amplifier and microphone conditioner simultaneously.

The 12AU is remote-controlled via its USB interface and a control program for Windows. You can operate the 12AU using a graphical user interface or by entering commands. Multiple 12AUs can be controlled from the same PC.

These features make the 12AU ideal for automated production line testing.

## ◆◆◆◆

All outputs except the speaker amplifier output have fixed 100 kHz (3 dB) low pass filters to minimize the need for anti-aliasing filtering in the following analyzing equipment. There is no phase shift between microphone input and output due to prepolarized or externally polarized microphones. It is designed without relays.

## ◆◆

GRAS

12AU 2

## ◆◆◆◆◆

GRAS

# Specifications

**GRAS 12AU 1-Channel Universal Power Module with signal conditioning and power amplifier**

Page: 4

Frequency range ( $\pm 3$ dB)	Hz	1 to 100 k
Output channel(s)		1
Output impedance	$\Omega$	100
Direct coupling input to output		No
Inherent noise, LIN (20 Hz to 20 kHz), grounded input	$\mu\text{Vrms}$	<1.5 ( $\geq 20$ dB Gain)
Inherent noise, LIN with dummy microphone (20 Hz to 20 kHz)	$\mu\text{Vrms}$	< 5
Gain settings, 10 dB steps	dB	0 to +50
Gain error	dB	< 0.2
High-pass filter		3-pole Butterworth, -1 dB @ 20 Hz
Linear mode		Yes
Type		Constant Current Power (CCP) and Traditional power supply (LEMO)
Input channel, CCP		1
Input channel(s), traditional power supply		1
Preamplifier supply	V	$\pm 15$
CCP preamplifier supply @ +28 V	mA	4
Polarization voltage	V	0 / 200
Overload indication		Yes
PC controllable		Yes
Monitor output connector		BNC
Monitor output impedance	$\Omega$	100
External filter option		No
Power amplifier input impedance	$\Omega$	10 k
Power amplifier output connector		2-pin LEMO
Power amplifier output current monitor connector		BNC
Power amplifier output current	Ap	1.4
Power amplifier gain settings, 10 dB steps	dB	-20 to 10



# Specifications

**GRAS 12AU 1-Channel Universal  
Power Module with signal  
conditioning and power amplifier**

Page: 5

Power amplifier frequency range	Hz	DC to 30 k
Power amplifier phase shift response ( $\pm 1$ deg)	Hz	DC to 20 k
Power amplifier output voltage	Vp	$\pm 13.5$
Power amplifier overload detection		Yes
Power supply, external ( $\pm 10$ %)	Vac	110 to 240
Battery low indication		No
Fuse	mA	500
Temperature range, operation	$^{\circ}\text{C} / ^{\circ}\text{F}$	-10 to +50 / 14 to 122
Weight	g / oz	2500.00 / 88.18

GRAS Sound & Vibration

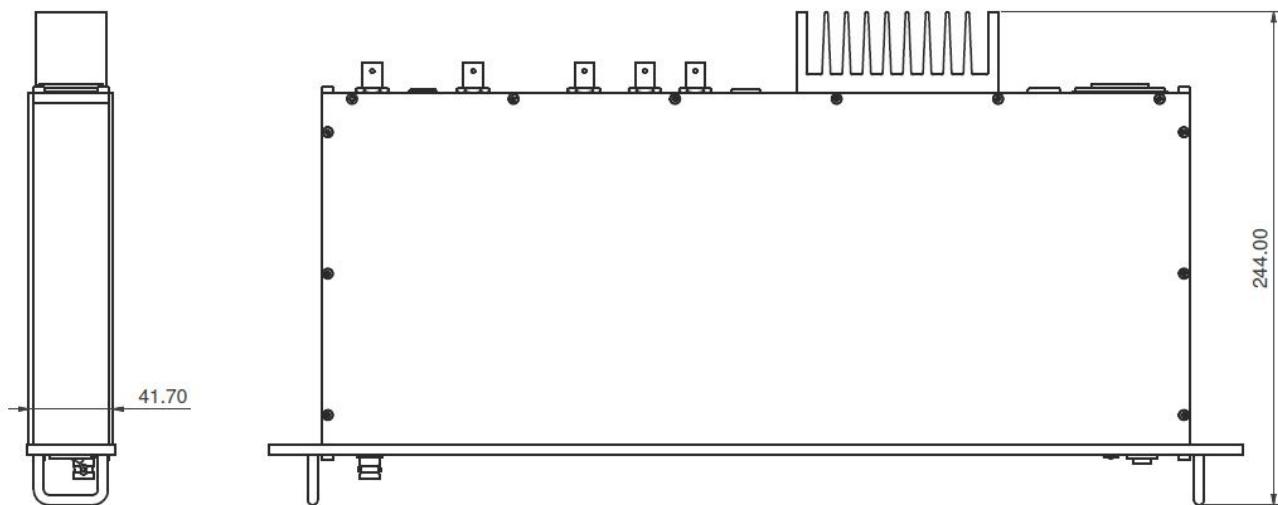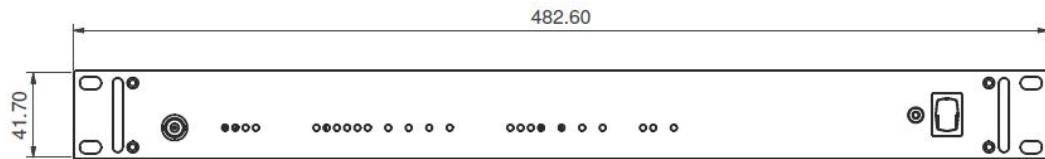

All dimensions in mm.



-

---

# GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

## HEAD OFFICE, DENMARK

**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

## USA

**GRAS SOUND & VIBRATION**  
9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

## UK

**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

## CHINA

**GRAS SOUND & VIBRATION**  
Room 315, RuiBo Center(T1)  
Lane683, Shenhong Rd,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 64203370  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require. GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand